

**KEY FEATURES**

- Switching Power Module for PCB Mountable
- Fully Encapsulated Plastic Case
- Regulated Output
- Low Ripple and Noise
- Small Size as ANC 15Watt with 50Watt Higher Power
- CE, CB and UL Approval
- 3-Year Product Warranty


**ELECTRICAL SPECIFICATIONS**

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No. ( Single Output )	ANC50-5S	ANC50-12S	ANC50-15S	ANC50-24S	ANC50-48S
Max Output Wattage (W)	40W	50W	50W	50W	50W
Input	Voltage				
	90-264 VAC or 120-370 VDC, " L " to DC " + " ; " N " to DC " - "				
	Frequency (Hz)				
	47-63 Hz				
	Current (Full load)				
	1000 mA max. (115 VAC) / 600 mA max. (230 VAC)				
Inrush Current (<2ms)					
40 A max. (115 VAC) / 60 A max. (230 VAC)					
Leakage Current					
0.25 mA max.					
External Fuse (recommend)					
3.15 A slow blow type					
Output	Voltage (V.DC.)				
	5V      12V      15V      24V      48V				
	Voltage Accuracy				
	±2%				
	Current (mA) max				
	8000      4167      3333      2083      1040				
	Line Regulation (LL-HL) (typ.)				
	±1%				
	Load Regulation (0-100%) (typ.)				
	±1%				
	Minimum Load				
0%					
Maximum Capacitive Load					
10000 uF      3500 uF      3000 uF      2200 uF      330uF					
Ripple & Noise					
120mV      120mV      150mV      240mV      480mV					
Efficiency (at 230 VAC)					
86%      90%      87%      88%      89%					
Hold-up Time					
10 ms min.					
Switching Frequency (typ.) ( at 230 VAC )					
65 kHz					
Protection	Over Power Protection				
	Hiccup technique, auto-recovery				
	Over Voltage Protection				
Zener diode clamp					
Short Circuit Protection					
Hiccup mode, indefinite (automatic recovery)					
Isolation	Input-Output (V.AC)				
	3000V				
	Input-FG (V.AC)				
1500V					
Output-FG (V.AC)					
500V					
Environment	Operating Temperature				
	-40°C...+70°C (with derating)				
	Storage Temperature				
	-40°C...+85°C				
	Temperature Coefficient				
±0.02%/°C					
Humidity					
95% RH					
MTBF					
>300,000 h @ 25°C (MIL-HDBK-217F)					
Physical	Dimensions (L x W x H)				
	2.91 x 2.13 x 0.86 Inches ( 74.1 x 54.1 x 21.8 mm ) Tolerance ±0.5 mm				
	Case Material				
	Plastic resin (flammability to UL 94V-0)				
Weight					
166 g					
Cooling Method					
Free air convection					

## ELECTRICAL SPECIFICATIONS


All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No. ( Single Output )	ANC50-5S	ANC50-12S	ANC50-15S	ANC50-24S	ANC50-48S
Safety	Agency Approvals IEC / EN 60950, UL / IEC / EN 62368-1				
EMC	EMI (Conducted & Radiated Emission) EN 55032				
	EMS (Noise Immunity) EN 55024				
	ESD EN61000-4-2 air ± 8kV , Contact ± 4kV (A)				
	Radiated Immunity EN61000-4-3 3V/m (A)				
	Fast Transient EN61000-4-4 ± 1kV (A)				
	Surge EN61000-4-5 ±2kV (A)				
	Conducted Immunity EN61000-4-6 3Vrms (A)				
	PFMF EN61000-4-8 1A/m (A)				
	Dips EN61000-4-11 30% 500ms (A)				

## NOTE

- Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
- It's recommended to add Varistor 14S471K at L / N input side in parallel.
- Please refer to our PDF file "AC-DC Application" on our website: [www.archcorp.com.tw](http://www.archcorp.com.tw)


## MECHANICAL DIMENSIONS ( Top View )

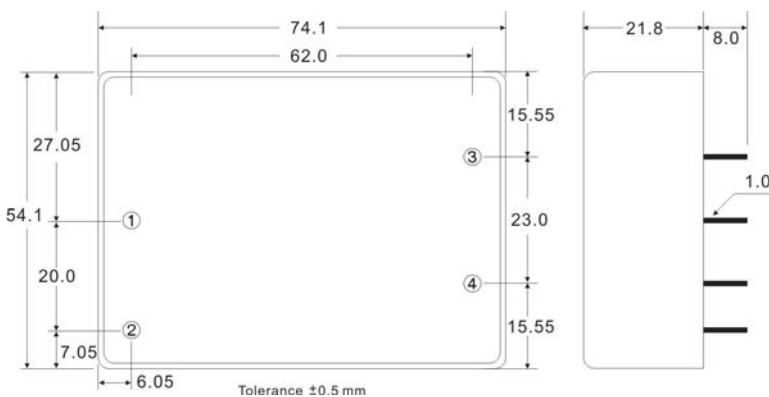

PIN#	Single
1	AC IN (N)
2	AC IN (L)
3	-DC OUT
4	+DC OUT

## BLOCK DIAGRAM

Single Output

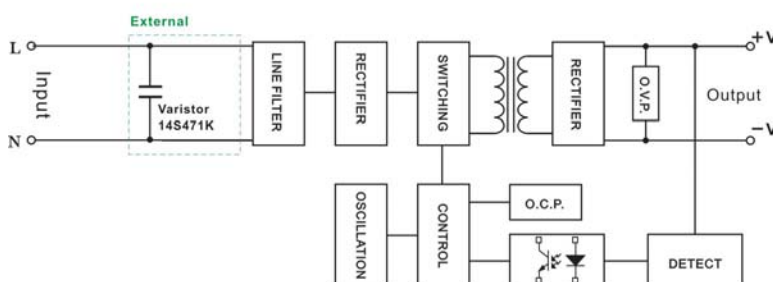

## DERATING

