

KEY FEATURES

- Switching Power Module for PCB Mountable
- 4000VAC Input to Output 2MOPP Insulation
- Cooling by Free Air Convection
- High Efficiency up to 93.5%
- With P.F.C. Function >0.9
- <0.5W No Load Input Power
- Protections: Over Load / Over Voltage / Over Temperature / Short Circuit
- EMI for Both Class I (with PE) and Class II (without PE) Configuration
- Suitable for BF Application with Appropriate System Consideration
- UL / IEC / EN 60601 3.2 Edition & UL / IEC / EN 62368 Safety Approvals
- 3-Year Product Warranty



ELECTRICAL SPECIFICATIONS

All specifications valid at 230VAC input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No.		MQC150-12S	MQC150-24S	MQC150-48S
Max Output Wattage (W)		150 W		
Input	Voltage (Note 3)	90-264 VAC		
	Frequency (Hz)	47-63 Hz		
	Current (Full load)	< 2.5 A max. (115 VAC) / < 1.25 A max. (230 VAC)		
	Inrush Current (<2ms)	< 45 A max. (115 VAC) / < 90 A max. (230 VAC)		
	Leakage Current	< 0.1mA / 264 VAC (Touch Current)		
	Power Factor	PF>0.9 at Full Load		
Output	Voltage (V.DC.)	12V	24V	48V
	Voltage Accuracy	±2%		
	Current (A) (max.)	12.5	6.25	3.125
	Line Regulation	±1%		
	Load Regulation (0-100%)	±1%		
	Minimum Load	0%		
	Maximum Capacitive Load	6000μF	2000μF	330μF
	Ripple & Noise (max.) (Note 1)	1% Vout		
	Efficiency (at 230VAC) (Note 4)	93%	93.5%	93.5%
Protection	Hold-up Time (at 115 VAC) (Note 2)	10 ms min.		
	Over Power Protection	Auto recovery, Hiccup mode		
	Over Voltage Protection	Auto recovery		
	Over Temperature Protection	Auto recovery		
Isolation	Short Circuit Protection	Protection level 1 (nominal) : Continuous, Auto recovery Protection level 2 (instantaneous high current) : Latch		
	Input-Output	4000VAC or 5656VDC		
	Input-PE	2000VAC or 2828VDC		
Environment	Output-PE	1500VAC or 2121VDC		
	Operating Temperature (Note 6)	-30°C...+70°C (with derating)		
	Storage Temperature	-30°C...+85°C		
	Temperature Coefficient	±0.05%/°C		
	Altitude During Operation	5000m		
	Humidity	95% RH		
	Atmospheric Pressure	56 kPa to 106 kPa		
	MTBF	>250,000 h @ 25°C (MIL-HDBK-217F, Notice 1)		
	Vibration	IEC60068-2-6 (10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes)		
	Shock	IEC60068-2-27		

ELECTRICAL SPECIFICATIONS



All specifications valid at 230VAC input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No.		MQC150-12S	MQC150-24S	MQC150-48S
Physical	Dimensions (L x W x H)	4.3 x 2.3 x 1.38 Inches (109.0 x 58.5 x 35.0 mm) Tolerance ± 0.5 mm, Height Tolerance ± 1 mm		
	Weight	365 g		
	Cooling Method	Free convection		
Safety	Approval	UL / IEC / EN 60601 3.2 rd Edition (2 x MOPP), UL / IEC / EN 62368-1		
EMC	Conducted EMI (Note 5)	EN55011 Conducted Class B		
	Radiated EMI (Note 5)	EN55011 Class I class B / Class II class A		
	EMS	EN60601-1-2 4th edition		

NOTE

- Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
- Hold-up Time measured at 90% Vout.
- Please check the derating curve for more details.
- After 30 minutes of burn-in
- Please secure the power supply unit to your metal case by using the four screw holes in the corners for either Class I or Class II equipment
- Due to varying customer application conditions, the product is tested for maximum operating temperature under full load only. For other regulatory requirements, please contact ARCH.
- CAUTION: Double pole, neutral fusing. Disconnect mains before servicing.
(ATTENTION : 2 poles avec fusible sur le neutre. Deconnecter le secteur avant intervention.)
- Please refer to our PDF file "AC-DC Application" on our website: www.archcorp.com.tw


DERATING

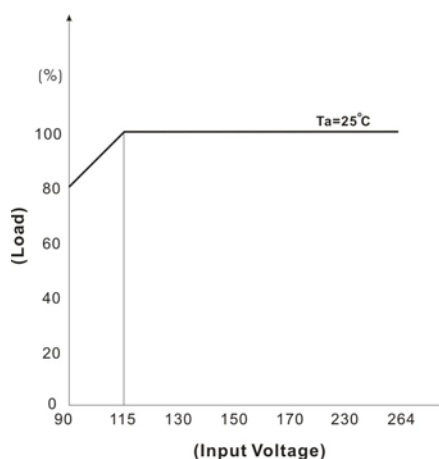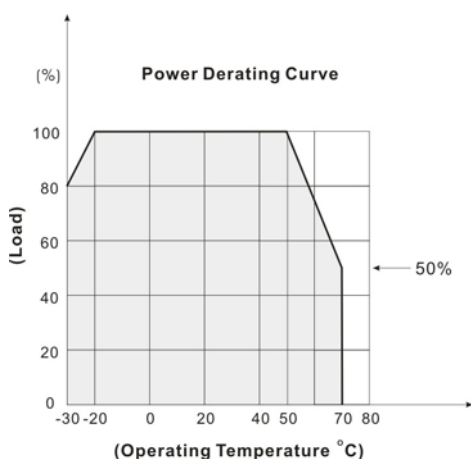

TRIM

	12S		24S		48S	
Trim → -V	+5%	0%	+5%	0%	+5%	0%
	34K Ω	~ 10M Ω	37.4K Ω	~ 10M Ω	38K Ω	~ 10M Ω
Trim → +V	0%	-5%	0%	-5%	0%	-5%
	10M Ω	~ 106K Ω	10M Ω	~ 270K Ω	10M Ω	~ 640K Ω

MECHANICAL DIMENSIONS (Top View)

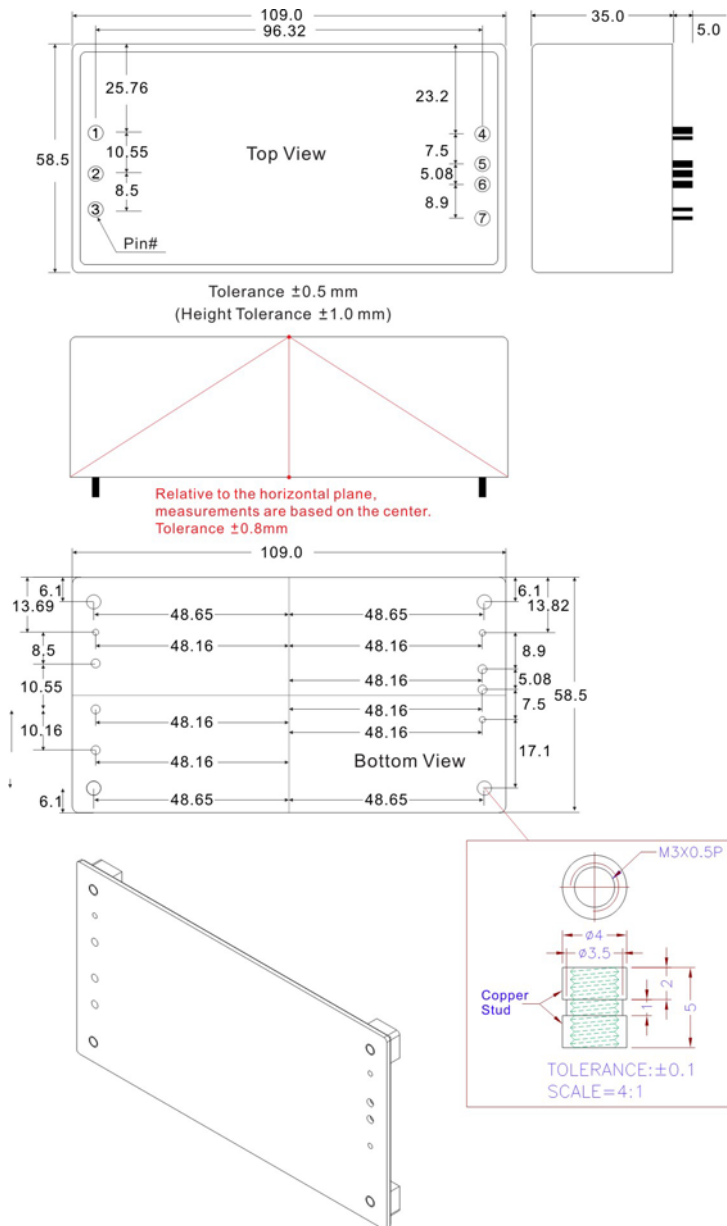

PIN#	Φ	Single
1	1.2 $\pm$ 0.3mm	AC IN (N)
2	1.2 $\pm$ 0.3mm	AC IN (L)
3	1.2 $\pm$ 0.3mm	PE
4	1.2 $\pm$ 0.3mm	ON / OFF
(Provide +5Vdc Controlled)		
5	1.8 $\pm$ 0.3mm	+DC OUT
6	1.8 $\pm$ 0.3mm	-DC OUT
7	1.2 $\pm$ 0.3mm	Trim

Remark:

Please reserve the pin 4 hole on PCB.

If the remote on/off function is not required, please connect the pin 4 circuit layout with pin6, or keep pin 4 floating.

BLOCK DIAGRAM

