

KEY FEATURES

- Universal Input Range 90-305VAC, 47-63 Hz
- I/O Isolation 4200VAC
- Operating Ambient Temperature Range -40°C to +85°C
- No Load Power Consumption < 0.1W
- 5000m Altitude Application
- Over-Voltage Category OVC III (New Edition)
- High Efficiency up to 87%
- Isolation Class II
- EMC Compliant without External Components
- Safety Approval to UL / IEC / EN 62368-1
- Design meet IEC / EN 61558-1, IEC / EN 61558-2-16, IEC / EN 60335-1
- 3-Year Product Warranty



ELECTRICAL SPECIFICATIONS

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No. (Single Output)	AFCV20-5S	AFCV20-12S	AFCV20-15S	AFCV20-24S
Max Output Wattage (W)	20W			
Input	Voltage			
	90-305 VAC or 120-430 VDC			
	Frequency (Hz)			
	47-63 Hz			
	Current (Full load)			
	385 mA max. (115 VAC) / 250 mA max. (230 VAC)			
Output	Inrush Current (Cold Start)			
	30 A max. (115 VAC) / 60 A max. (230 VAC)			
	No Load Power Consumption			
	< 0.1W (115/230 VAC)			
	External Fuse (mandatory)			
	2 A slow blow type			
Output	Voltage (V.DC.)			
	5V	12V	15V	24V
	Voltage Accuracy			
	±2%			
	Current (mA) max			
	4000	1670	1330	833
	Maximum Capacitive Load			
	10000 uF	1500 uF	1000 uF	470 uF
	Minimum Load			
	0%			
Protection	Line Regulation (LL-HL) (typ.)			
	±0.5%			
	Load Regulation (typ.)			
	±1%			
	Ripple & Noise (Full load)			
	120mV (Vp-p)			1% of Vout
	Efficiency (at 230VAC)			
	85%	86%	87%	87%
Hold-up Time(typ)				
6 ms (at 115VAC) / 46 ms (at 230VAC)				
Isolation	Over Power Protection			
	Hiccup technique, auto-recovery			
	Over Voltage Protection			
Zener diode clamp				
Isolation	Short Circuit Protection			
	Hiccup mode, indefinite (automatic recovery)			
Environment	Input-Output (V.AC)			
	4200V			
	Operating Temperature			
	-40°C...+85°C (with derating)			
	Storage Temperature			
	-40°C...+85°C			
	Temperature Coefficient			
	±0.05%/°C			
	Altitude During Operation			
	5000m (UL / IEC / EN 62368-1)			
Physical	Humidity			
	95% RH			
	MTBF			
	>400,000 h @ 25°C (MIL-HDBK-217F)			
	Over Voltage Category			
	III: Compliance to EN 61558; altitude up to 2000 meters.			
	Vibration			
	IEC60068-2-6 (10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes)			
Shock				
IEC60068-2-27				
Physical	Dimensions (L x W x H)			
	2.07 x 1.08 x 0.93 Inches (52.5 x 27.5 x 23.5 mm) Tolerance ±0.5 mm			
	Case Material			
	Plastic resin (flammability to UL 94V-0)			
Physical	Weight			
	62 g			
	Cooling Method			
Free air convection				
Safety	Approval			
	UL / IEC / EN 62368-1 (In Progress)			
Safety	Meet			
	IEC / EN 61558-1, IEC / EN 61558-2-16, IEC / EN 60335-1 (In Progress)			
EMC	EMI (Conducted & Radiated Emission)			
	EN 55032 class B (In Progress)			
EMC	EMS (Noise Immunity)			
	EN 55035 (In Progress)			

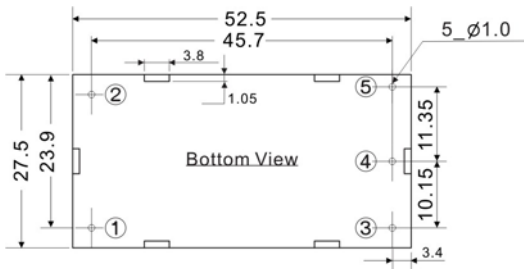
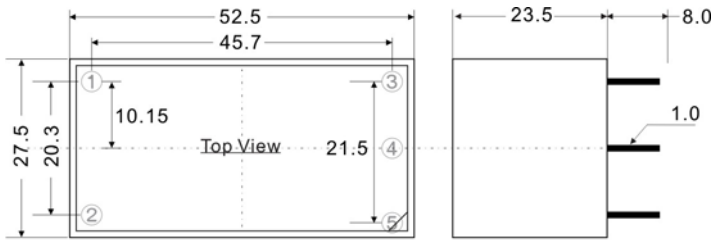
ELECTRICAL SPECIFICATIONS

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No. (Single Output)	AFCV20-5S12S		AFCV20-12D		AFCV20-15D		
Max Output Wattage (W)	18.4W		20W				
Input	Voltage	90-305 VAC or 120-430 VDC					
	Frequency (Hz)	47-63 Hz					
	Current (Full load)	385 mA max. (115 VAC) / 250 mA max. (230 VAC)					
	Inrush Current (Cold Start)	30 A max. (115 VAC) / 60 A max. (230 VAC)					
	No Load Power Consumption	< 0.1W (115/230 VAC)					
	External Fuse (mandatory)	2 A slow blow type					
Output		Output 1	Output 2	Output 1	Output 2	Output 1	Output 2
	Voltage (V.DC.)	5V	12V	+12V	-12V	+15V	-15V
	Voltage Accuracy	±5%	±6%	±5%			
	Current (mA) max	2000	700	833	833	666	666
	Maximum Capacitive Load	5000 uF	750 uF	±1000 uF		±470 uF	
	Minimum Load	25%					
	Line Regulation (LL-HL) (typ.)	±5%					
	Load Regulation (typ.) (25-100%) (Symmetric Load)	±2%	±4%	±1%			
	Ripple & Noise (Full load)	150mV (Vp-p)					
	Efficiency (at 230VAC)	81%		85%		85%	
	Hold-up Time(typ)	6 ms (at 115VAC) / 46 ms (at 230VAC)					
Protection	Over Power Protection	Hiccup technique, auto-recovery					
	Over Voltage Protection	Zener diode clamp					
	Short Circuit Protection	Hiccup mode, indefinite (automatic recovery)					
Isolation	Input-Output (V.AC)	4200V					
Environment	Operating Temperature	-40°C...+85°C (with derating)					
	Storage Temperature	-40°C...+85°C					
	Temperature Coefficient	±0.05%/°C					
	Altitude During Operation	5000m (UL / IEC / EN 62368-1)					
	Humidity	95% RH					
	MTBF	>400,000 h @ 25°C (MIL-HDBK-217F)					
	Over Voltage Category	III: Compliance to EN 61558; altitude up to 2000 meters.					
	Vibration	IEC60068-2-6 (10-500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes)					
Shock	IEC60068-2-27						
Physical	Dimensions (L x W x H)	2.07 x 1.08 x 0.93 Inches (52.5 x 27.5 x 23.5 mm) Tolerance ±0.5 mm					
	Case Material	Plastic resin (flammability to UL 94V-0)					
	Weight	62 g					
	Cooling Method	Free air convection					
Safety	Approval	UL / IEC / EN 62368-1 (In Progress)					
	Meet	IEC / EN 61558-1, IEC / EN 61558-2-16, IEC / EN 60335-1 (In Progress)					
EMC	EMI (Conducted & Radiated Emission)	EN 55032 class B (In Progress)					
	EMS (Noise Immunity)	EN 55035 (In Progress)					

NOTE

- Ripple & Noise are measured at 20MHz of bandwidth with 0.1 uF & 47uF parallel capacitor.
- The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- Please refer to our PDF file "AC-DC Application" on our website: www.archcorp.com.tw

MECHANICAL DIMENSIONS (Top View)


PIN#	Single	Dual	5S12S
1	AC IN (L)	AC IN (L)	AC IN (L)
2	AC IN (N)	AC IN (N)	AC IN (N)
3	+DC OUT	+DC OUT	+12V OUT
4	-DC OUT	COMMON	+5V OUT
5	NO PIN	-DC OUT	COMMON

DERATING
